

AERODROME CHART

● ATIS - 118.8		● CLNC DEL - 126.4		● TWR - 119.7 239.6		DEP - 133.85	
● LWIS - 118.8		● GND - 121.9 361.4		● RADIO Kamloops - 119.7		MF*	
DECL	DISTS	03	21	09	27	14	32
TORA		5027	5027	6998	6998	5001	5001
TODA		6011	5381	7982	7982	5329	5703
ASDA		5027	5027	6998	6998	5001	5001
LDA		3622	4141	6998	6998	4574	5001

Twy M restricted to 12,500 lbs.

Taxi route for arriving wide-bodied a/c is:

- via Twy E, Twy G, Rwy 03-21, Twy B.

Taxi route for departing wide-bodied a/c is:

- via Twy B, Rwy 03-21, Twy G, Twy E.

Threshold 03 displaced 1405'.

Threshold 21 displaced 886'.

Threshold 14 displaced 427'.

Night take-offs permitted Rwy 03, otherwise 03-21 usable day only.

SEAPLANE RAMP



Airside Operations Center

Taxiway C and Apron II restricted to 50,000 lbs.


Apron IV restricted to scheduled commercial t/c only. Exceptions require prior approval of aprt operator.

Taxiway S wingtip clearance restricted up to Class C aircraft only.

* DEPARTURE PROCEDURE Refer to SID

LDA FOR SIMULTANEOUS RUNWAY OPERATIONS		
FROM	TO	LDA in ft
Thld rwy 27	Short of Rwy 03-21	3044
Thld rwy 27	Short of Rwy 14-32	4464
Thld rwy 09	Short of Rwy 03-21	3173
Thld rwy 32	Short of Rwy 09-27	3398

Rwy 03-21 restricted to max 65,000 lbs for take-off and landing. No weight restriction for taxiing a/c Rwy 03-21 S of Rwy 14-32.

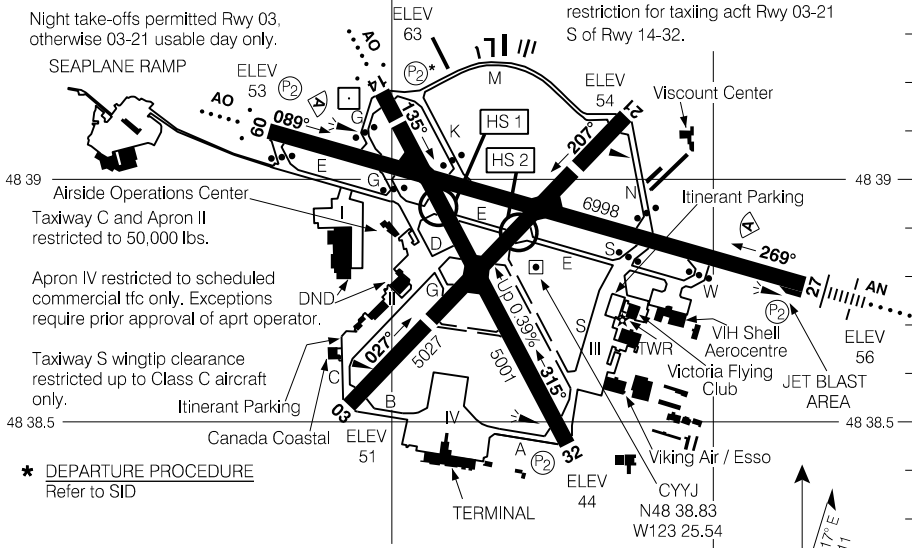

TORA FOR INTERSECTION DEPARTURES									
RWY	INTXN	TORA in ft	RWY	INTXN	TORA in ft	RWY	INTXN	TORA in ft	
09	G	5500	27	W	5700	14	E	3200	
	K	4500		S/N	4900		21	E	2900



123 26		123 25	
RUNWAY LEVEL OF SERVICE			
RVO		LVO	
RWY 09, 27: RVR 1200		NOT AUTHORIZED	
TAKE-OFF MINIMA			
Rwys 03, 09, 14, 27, 32: *			
Rwy 21: NOT ASSESSED			
SCALE IN FEET			
1000 0 1000 2000			

AERODROME CHART

EFF 28 FEB 19

CYYJ

Source of Canadian Civil Aeronautical Data: © 2019 NAV CANADA All rights reserved